


PH663 - AIR & WATER DISCHARGE HOSE FRAS - 20 BAR

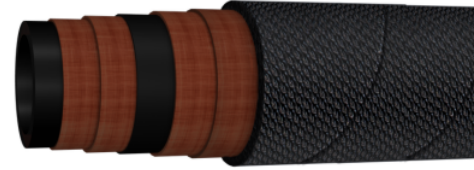

Construction

Inner tube Black colour, Conductive synthetic rubber resistant to air and water

Reinforcement Plies of synthetic textile cord

Cover Black colour, Conductive Synthetic rubber resistant to air and water

Application Hose designed for Air, water & stone dust delivery in underground mines

Item Code	Dash Size	ID		OD		WP		BP		W
		inch	mm	inch	mm	psi	bar	psi	bar	kg/m
PH663-16	-16	1	25.0	1.34	34.0	300	20	900	60	0.53
PH663-20	-20	1.1/4	32.0	1.65	42.0	300	20	900	60	0.84
PH663-24	-24	1.1/2	38.0	1.89	48.0	300	20	900	60	0.98
PH663-32	-32	2	51.0	2.44	62.0	300	20	900	60	1.10
PH663-40	-40	2.1/2	63.0	2.99	76.0	300	20	900	60	1.50
PH663-48	-48	3	76.0	3.50	89.0	300	20	900	60	1.72
PH663-56	-56	3.1/2	89.0	4.06	103.0	300	20	900	60	2.10
PH663-64	-64	4	102.0	4.57	116.0	300	20	900	60	2.40
PH663-80	-80	5	127.0	5.59	142.0	300	20	900	60	3.00
PH663-96	-96	6	152.0	6.57	167.0	300	20	900	60	5.00
PH663-128	128	8	203.0	8.62	219.0	300	20	900	60	7.20



Temperature Range : Continuous: -20°C to +85°C