


PH401 OIL AND COMPRESSED AIR HOSE

Construction

- Inner tube** Black Color, AEM rubber
- Reinforcement** Double textile aramid braid with steel wire helix
- Cover** Black colour, AEM rubber
- Application** Oil coolers, lubricants and oil injected screw compressor applications.

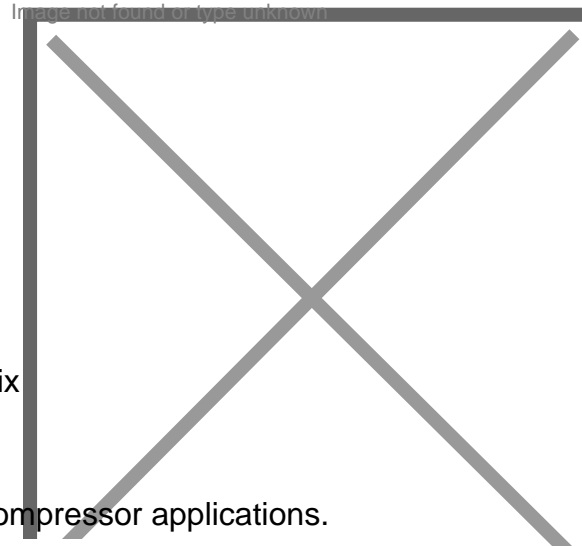

| Item Code | Dash Size | DN | ID | | OD | | WP | | BP | | BR/r | | W |
|-----------|-----------|----|------|------|------|----|-----|-----|------|-----|------|-----|-------|
| | | | inch | mm | inch | mm | psi | bar | psi | bar | inch | mm | kg/m |
| PH401-16 | -16 | 25 | 1 | 25.6 | 1.37 | 35 | 220 | 15 | 1740 | 120 | 6.7 | 170 | 0.563 |



Temperature Range : Continuous: -40°C to +150°C

Intermittent : +175°C