


**PH695 - STEAM HOSE**

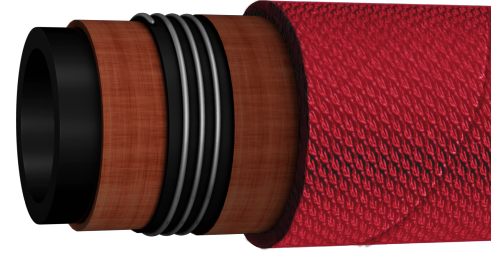

**Construction**

**Inner tube** Black colour, EPDM rubber resistant to high temperature steam

**Reinforcement** High tensile synthetic textile cords with steel wire helix

**Cover** Red colour, EPDM rubber resistance to heat and weather

**Application** Hardwell hose for conveying steam at maximum working pressure of 18 bar, used in chemical industries and industrial application in general, where tighter bending radius is necessary

Item Code	Dash Size	DN	ID		OD		WP		BP		V	BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	bar	inch	mm	kg/m
PH695-32	-32	51	2	50.8	2.76	70.0	260	18	2610	180	14.2	0.9	360	2.750
PH695-40	-40	63	2.1/2	63.0	3.39	86.0	260	18	2610	180	17.5	0.9	445	3.750
PH695-48	-48	76	3	76.0	3.86	98.0	260	18	2610	180	21.1	0.9	535	4.480
PH695-64	-64	102	4	102.0	4.88	124.0	260	18	2610	180	28.1	0.9	715	6.122



**Temperature Range** : Continuous: -40°C to +210°C