


**PH765 - MEDIUM PRESSURE FLUORO - COMP HOSE**

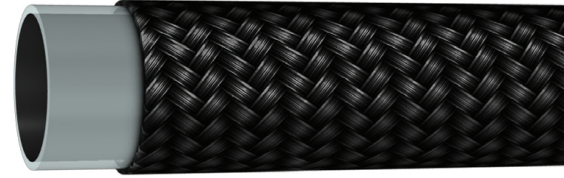

**Construction**

**Inner tube** Polytetrafluoroethylene (PTFE) - Conductive

**Reinforcement** One or two braids of Fiber Glass Yarn

**Application** P.T.F.E hose has an excellent temperature characteristics both in high and low temperature, Excellent chemical resistance, non contamination properties, low coefficient of friction and resists deterioration. Combination of the fiberglass outer braid and PTFE liner, make the hose essentially non-flammable. Ultimate fuel compatibility and Formable

Item Code	ID		OD		WP		BP		BR/r		W
	inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH765-04	1/4	6.40	0.428	10.87	800	54.0	3200	216	2.8	70	115
PH765-05	5/16	8.00	0.499	12.68	800	54.0	3200	216	3.0	76	130
PH765-06	3/8	9.53	0.605	15.37	800	54.0	3200	216	3.3	83	165
PH765-07	7/16	10.90	0.663	16.84	800	54.0	3200	216	3.8	96	175
PH765-08	1/2	13.00	0.769	19.53	800	54.0	3200	216	5.3	134	185



**Temperature Range** : Continuous: -54°C to +260°C