


**PH902R - 2 SPIRALS OF HIGH TENSILE STEEL WIRE**

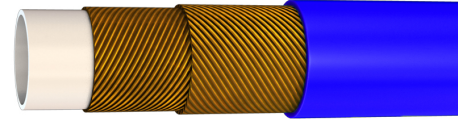


**Construction**

- Inner tube** Polyoxymethylene (POM)
- Reinforcement** 2 Spirals of high tensile steel wire
- Cover** Polyamide (PA)

**Application** Water blast: Heat exchanger tube cleaning. Hydraulics: Pressure test equipment (valves, tooling and control panels), hydraulic tools (instrumentation packages for gauges, control of service equipment, hydraulic jacks, hydraulic tools)

Item sfdag Code	DN	ID		OD		WP		BP		BR/r		W
		inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH902R-025	4	5/32	4.0	0.319	8.1	20300	1400	50750	3500	2.9	75	112
PH902R-03	5	3/16	4.9	0.374	9.5	20300	1400	50750	3500	3.7	95	148
PH902R-04	6	1/4	6.3	0.457	11.6	15950	1100	39875	2750	4.3	110	175

**WJTA-IMCA Color Coding Scheme for Pressure Hoses - Maximum Working Pressure Applicable**



**Temperature Range** : Continuous : -30°C to +70°C