


PH721 / PH722 - FLUOROPOLYMER - LOW PRESSURE CONDUCTIVE / NON - CONDUCTIVE

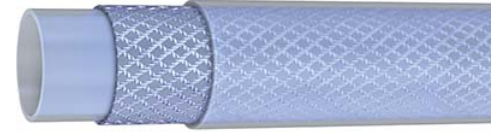

Construction :

Inner tube : FEP (Fluorinated Ethylene Propylene)

Reinforcement : Single braid of synthetic fiber

Cover : Polyurethane, Transparent

Application : Conventional paint Spraying, Low pressure paint circulation and supply, Low pressure electrostatic lacquer system, Low pressure chemical product supply systems

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH721 / PH722-04	-04	06	1/4	6.4	0.472	12.0	290	20	1160	80	3.5	90	117
PH721 / PH722-06	-06	10	3/8	9.5	0.600	15.2	220	15	880	60	5.1	130	175
PH721 / PH722-08	-08	12	1/2	12.7	0.827	21.0	145	10	580	40	7.1	180	275



Temperature Range : Continuous: -40°C to +95°C Temp. not to exceed +70°C for Air and Water based fluids