


## PH690 - AVIATION FUEL HOSE

Applicable Standard : EI 1529 Type - C / ISO 1825 Type - C

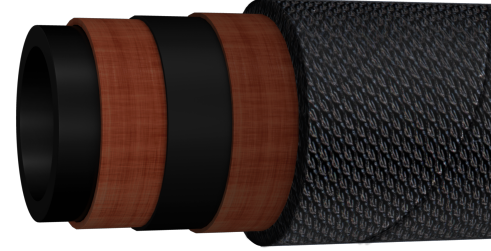

### Construction

<b>Inner tube</b>	Black Colour, Synthetic rubber resistant to oil
<b>Reinforcement</b>	Plies of synthetic textile cords
<b>Cover</b>	Black colour, synthetic conductive cover resistant to oil, ozone and abrasion
<b>Application</b>	Aircraft fuelling with jet fuels. Portability, ease of routing and ease of of installation area additional virtues.

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	kg/m
PH690-12	-12	19	3/4	19.0	1.38	35.0	300	20	1200	80	3.5	90	0.800
PH690-16	-16	25	1	25.4	1.63	41.5	300	20	1200	80	4.5	115	1.000
PH690-20	-20	32	1.1/4	32.0	1.89	48.0	300	20	1200	80	5.5	140	1.300
PH690-24	-24	38	1.1/2	38.0	2.19	55.5	300	20	1200	80	7.1	180	1.830
PH690-32	-32	50	2	51.0	2.66	67.5	300	20	1200	80	8.5	215	2.580
PH690-40	-40	63	2.1/2	63.0	3.23	82.0	300	20	1200	80	9.1	230	3.100



**Temperature Range** : Continuous: -30°C to +65°C